

## ***Section 4.0***

---

# ***Rigger Information***

---

#### 4.1 Orange Warning Label Placard Data

As Part of the manufacturers requirements, the ORANGE WARNING LABEL, located on the back pad, must be filled in by the Rigger assembling canopies to the **TALON FS**.

**FAILURE TO COMPLETE ORANGE WARNING LABEL WILL  
RESULT IN THE TSO BEING NULL AND VOID!**

	MAIN	RESERVE
<b>MAXIMUM DEPLOYMENT SPEED:</b>		
<b>MAXIMUM GROSS WEIGHT (JUMPER + CLOTHING + EQUIPMENT:</b>		
<b>MANUFACTURER:</b>		
<b>MODEL:</b>		
<b>ATTENTION RIGGERS:</b>	<ul style="list-style-type: none"><li>• REFER TO OWNERS MANUAL FOR PLACARD INFORMATION AND COMPATIBILITY LIMITATIONS.</li><li>• FILL IN DATA WITH WATERPROOF PEN.</li><li>• CHANGE DATA ON LABEL IF A DIFFERENT CANOPY IS INSTALLED</li></ul>	

The data required for the warning label is obtained from the canopy manufacturer and should be found on the canopy warning label or data panel, as well as the Owner's Manual.

Please note that there may be instances where one model canopy may have TWO DIFFERENT placard limitations; one as a reserve and one as a main. An example of this is the Precision Super Raven 4 canopy. As a reserve it is limited to 254 lb. maximum gross weight. However, as a main it is placarded at 288 lb. Make sure that your Rigger marks the correct space with the right category information.

## 4.2 Parachute Assembly Inspection Form

<b>Parachute Assembly Inspection Form</b>		
<b>! Note: Count all Tools Before Starting Assembly</b>		<b>Qty:</b>
<div style="font-size: 3em; font-weight: bold; margin-bottom: 10px;">A</div> <b>Harness and Container</b>	Manufacturer:	
	Model:	
	Date of manufacture:	
	Serial no:	
<div style="display: flex; justify-content: space-between;"> <span><i>Initial After Each Item If No Discrepancies Are Found</i></span> <span><i>Initials</i></span> </div>		
1.	Main lift web	
2.	Chest and leg straps	
3.	Harness hardware and Flex-rings	
4.	3-ring release	
5.	Pilot chute pocket	
6.	Reserve ripcord, handle pocket, cable housing	
7.	Cutaway handle, attachment point, cable housing and channels	
8.	Container flaps and grommets	
9.	Closing loop length and condition (main and reserve)	
10.	Comments:	
<div style="font-size: 3em; font-weight: bold; margin-bottom: 10px;">B</div> <b>Main Canopy and Pilot chute</b>	Manufacturer:	
	Model:	
	Date of manufacture:	
	Serial no.:	
<div style="display: flex; justify-content: space-between;"> <span><i>Initial After Each Item If No Discrepancies Are Found</i></span> <span><i>Initials</i></span> </div>		
1.	Risers and 3-Ring	
2.	Connector links and slider bumpers	
3.	Slider grommets, tapes, fabric	
4.	A-lines and attachment points	
5.	B-lines and attachment points	
6.	C-lines and attachment points	
7.	D-lines and attachment points	
8.	Steering lines and toggles	
9.	Canopy cells and cross-ports	
10.	Slider stops ( on canopy )	
11.	Bridle line, d-bag stop, pin	
12.	Pilot chute and handle or pud	
13.	Deployment bag	
14.	Comments:	

<b>C</b>		Manufacturer:	
		Model:	
Square Reserve Canopy		Date of manufacture:	
and Pilot chute		Serial no:	
<i>Initial After Each Item If No Discrepancies Are Found</i>			<i>Initials</i>
1.	Risers		
2.	Connector links		
3.	Sliders & Grommets		
4.	A-lines and attachment points		
5.	B-lines and attachment points		
6.	C-lines and attachment points		
7.	D-lines and attachment points		
8.	Steering lines and toggles		
9.	Canopy cells and cross ports		
10.	Slider stops (on canopy)		
11.	Deployment bag and safety stow		
12..	Bridle line		
13.	Pilot chute		
14.	Packing card and information		
15.	Comments:		
<b>D</b>			
Assembly of			
Square Reserve Canopy			
<i>Initial After Each Item If No Discrepancies Are Found</i>			<i>Initials</i>
1.	Inspection of canopy and Container completed (parts A & C )		
2.	Line Continuity correct including steering lines thru slider grommets		
3.	Slider on correctly		
4.	Rapide™ links tightened or Slinks™ assembled correctly.		
5.	Steering lines tied to toggles on mark		
6.	Steering line length equal to each other		
7.	Safety stow on deployment bag installed		
8.	Packing data card filled out		
9.	Packed according to manufacturers instructions		
10.	Reserve pin sealed		
11.	Fill out warning label		
12.	Comments:		

# E

Assembly of

Main Canopy to Container

*Initial After Each Item If No Discrepancies Are Found*

*Initials*

- |     |  |  |
|-----|--|--|
| 1.  | Inspection of canopy and Container completed (parts A & B )            |  |
| 2.  | Line continuity correct including steering lines thru slider grommets. |  |
| 3.  | Slider on correctly  |  |
| 4.  | Release handle cables are proper lengths                               |  |
| 5.  | Rapide™ links tightened or Slinks™ assembled correctly                 |  |
| 6.  | Steering lines tied to toggles on mark                                 |  |
| 7.  | Steering line length equal to each other                               |  |
| 8.  | D-bag, bridle and pilot chute are attached properly                    |  |
| 9.  | Fill out warning label   |  |
| 10. | Comments:  |  |

! Note: Count all tools after assembly and packing is completed to ensure that none were left in the canopy or container.

Qty:

Signature of Rigger(s) Inspection

Signature:

Date:

Print Name and Seal Symbol:

Signature:

Date:

Print name and Seal Symbol:

General Comments:

## 4.3 Ram-Air Reserve Packing Instructions

**Prior to assembling and packing a square reserve into a TALON FS, the rigger must thoroughly read and understand these instructions.** The rigger must determine reserve and container compatibility based upon volume, deployment type and placard information. Only reserve canopies that have been assigned weight and speed limits by the canopy manufacturer are approved for use in the TALON FS. The rigger who assembles the reserve is responsible for completing the Orange Warning Label. Refer to the Rigging Innovations Warning Label Placard Data Sheet for proper information.

**NOTE: Minimum qualification; FAA Senior or Master Parachute Rigger or foreign equivalent.**

### 4.3.1 Assembling The Reserve System

#### **BACKGROUND**

*Rigging Innovations mandates PRO (Proper Ram-Air Orientation) packing on the floor for packing TALON FS reserve containers. PRO packing results in the best bulk distribution and greatest comfort for the wearer. The molar method is used to insert the parachute into deployment bag. In the last several years there have been developed several different techniques of PRO packing. They all end in the same result. It is up to the rigger to determine whether their particular technique is in compliance with the intent of these instructions.*

*The method shown in the following section is just an example as to how the TALON FS may be packed. Depending on the size and model of the canopy and the size of the container, the exact folding of the canopy may vary slightly to accommodate the bulk needed to shape the deployment bag.*

*The canopy/rig combination shown in the following photographs is a T0 size TALON FS with a PD-113R reserve canopy.*

**Step 1.** Assemble an appropriate size reserve parachute to the **TALON FS** harness and container system ensuring the following:

- 1.2 Line continuity is correct.
- 1.3 Connector link bumpers installed and tied per canopy manufacturer's instructions.
- 1.4 Connector links are tightened finger tight plus one quarter turn of the barrel. **WARNING:** If Maillon rapide links are too tight, barrels will crack.
- 1.5 Mark connector links with a fine line from a permanent Marker.
- 1.6 Steering lines are routed through rear grommets on slider.
- 1.7 Steering lines are routed through guide rings on rear risers.
- 1.8 Steering toggles are securely attached.
- 1.9 Automatic Activation Device correctly installed.
- 1.10 Closing loop length is checked. (See Table IV for approximate length).
- 1.11 Completely inspect the canopy.

**NOTE:** Rigging Innovations has tested and evaluated the Slink™ brand of Soft Link manufactured by Performance Designs Inc. **RI HIGHLY RECOMMENDS** the use of this product in conjunction with the **TALON FS** harness and container system. The use of this product results in a stronger assembly that is easier to pack and more comfortable to the wearer as it eliminates the metal links and the corresponding slider bumper bulk.

#### **4.3.2 Table IV -Approximate Closing Loop Lengths**

**NOTE:** The loop length recommended in this chart is an **approximation** based on packing experience in our facility. Variables such as canopy size, temperature, humidity, and packing technique will affect the best loop length. In addition, these lengths include the additional length necessary for the Cypres™ cutter.

**IT IS THE RIGGER’S RESPONSIBILITY TO ENSURE THE RIPCORDER PULL FORCE DOES NOT EXCEED 22 Lb. (10 Kg.).**

The loop length is measured from the washer to end of the loop.

**TABLE IV**

CONTAINER SIZE	LENGTH
T0	5.12”/130mm
T1	5.12”/130mm
T2	5.25”/133mm
T5	4.75”/119mm
T6	5.75”/144mm
T7	5.75”/144mm
T8	5.50”/138mm

**NOTE: Only CYPRES™ type closing loops are approved for use with “loop-cutter” Automatic Activation Devices. Thicker loops made from other materials are dangerous because they may slow pack opening and reserve deployment.**

#### **4.3.3 Cypres™ AAD Reserve Installation**

Only modern, electronic “loop cutter” type AADs have been tested and approved for use with the TALON FS system. The most popular brand of loop cutter AAD is the CYPRES™ manufactured by Airtec GmbH, in Germany. The very small container volumes and closing configuration of TALON FS prevent the use of older style AADs.

The TALON FS comes “CYPRES™-ready” from the factory with all the pockets, channels and other parts necessary for direct installation of the AAD without further modification.

The following instructions tell the rigger how to install a CYPRES™ in the TALON FS. However, it is important that the rigger also have a current copy of the CYPRES™ Rigger's Guide to familiarize him or her with the total CYPRES™ concept. Also, the rigger should have a CYPRES™ Rigger's Kit containing several useful tools when installing a CYPRES™.

**Step 1.** The reserve locking loop supplied with the CYPRES™ MUST be used. Special discs supplied with CYPRES™ must also be used to make knots for locking loop.

**Step 2.** Adjust locking loop to appropriate length in accordance with Table IV. Install locking loop into container.

**Step 3.** Install CYPRES™ processing unit into spandex pocket on divider wall at bottom of reserve container. (Fig 4-1)

**Step 4.** Thread cutter unit up through grommet and then through spandex channel on inside of right reserve side flap. Push cutter through elastic keeper next to grommet and align hole in cutter with grommet. (Fig 4-2)



Fig 4-1



Fig 4-2

**Step 5.** Carefully coil excess cutter cable under Velcro closure flap located on right end of CYPRES™ installation pocket. DO NOT bend or kink excess cable. (Fig 4-3)

**Step 6.** Carefully push control unit through channel on bottom of reserve container from bottom to top. (Fig 4-4)



Fig 4-3



Fig 4-4



**Step 7.** Gently slide control unit out through the upper right corner of reserve pack tray (*Fig 4-5*) and into the spandex pocket at the yoke area. Double check that control button, display and red light are visible in pocket window. (*Fig 4-6*)

**Step 8.** Pull slack in control cable back down into pack tray, leaving about 1/2" (1 cm) slack where cable curves into the container. Coil excess cable neatly without kinks or sharp bends into the tunnel pocket on pack tray at the right side of the stiffener plate. (*Fig 4-7*)



Fig 4-5



Fig 4-6



Fig 4-7

#### **4.3.4 Folding the Reserve Parachute**

***Before you start!*** Check for recent updates or R.I. Service Bulletins

**Telephone:** 520.466.2655

**FAX:** 520.466.2656

**Website:** [www.rigginginnovations.com](http://www.rigginginnovations.com)

#### **List of Recommended Tools:**

- 2- Packing weights, 4 Lb. (2 Kg)
- 1- Packing weight, 22 Lb. (10 Kg)
- 5- Plastic or rubber tipped packing clamps, (PONY size 3202) flagged
- 1- Packing paddle 18" (50cm) or longer
- 1- Pull-up cord (microline), 72" (1.82m)
- 1- Gun Cleaning Rod, .22-CALIBER (5.56mm)
- 1- Knee-board or V-type closing plate
- 1- Temporary pin flagged

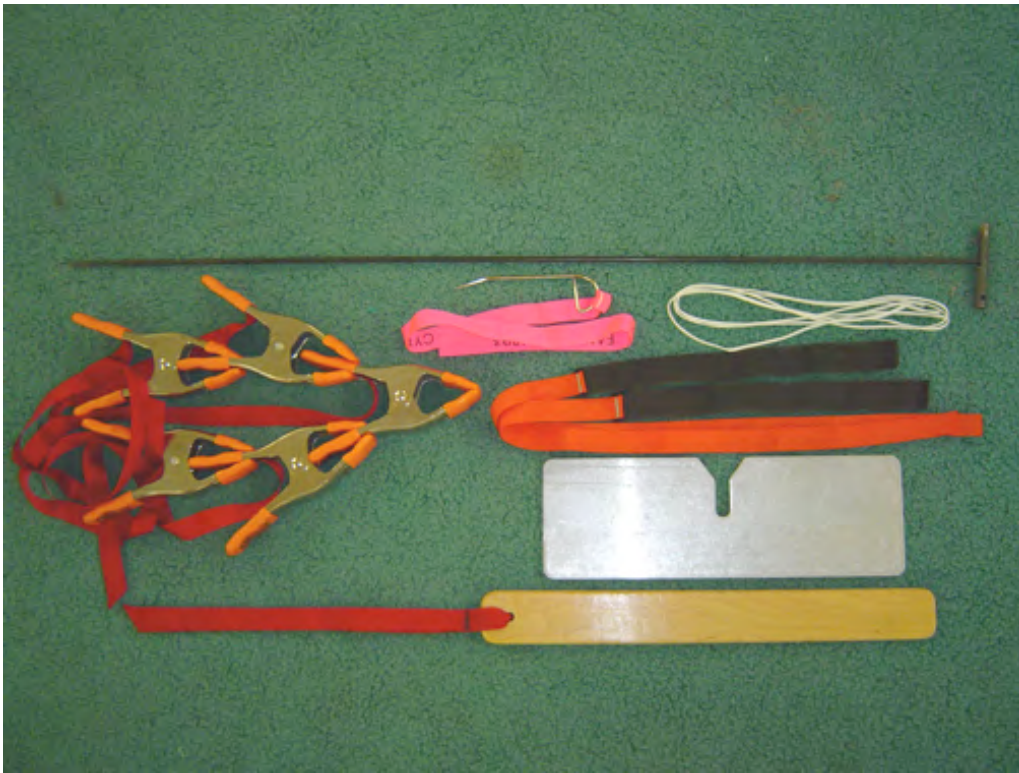


Fig 4-8

***!! WARNING !!***

***If T-Bars or "Positive Leverage Closing Devices" are used to close TALON FS containers, operate them with caution ! These tools can damage containers and cause impossible ripcord pull forces !***

## **Reserve Parachute Pro Packing Instructions**

### **1-Basic layout and setting up packing clamps**

Anchor the risers at the connector links including the steering lines.

(Fig. 4-9)

Place packing weight on top of it.



Fig 4-9

Pull the slider down to the connector links. Make sure the tapes face upwards towards the canopy.

(Fig 4-10)



Fig 4-10

Lay the canopy on its right side.  
(Note: A mirror image of the layout is permissible).

Flake the canopy so that the top seams are even. Place a clamp on the top of the canopy in line with each line attachment point as in the photo.  
(Fig 4-11)

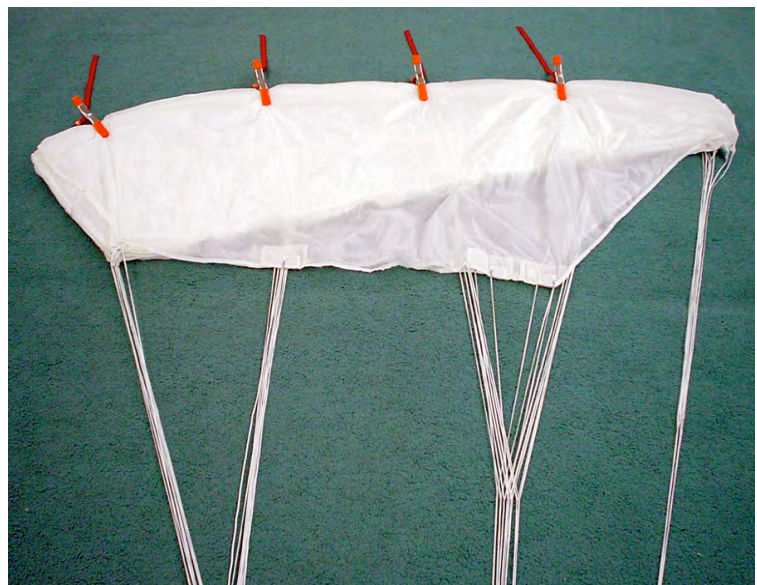


Fig 4-11

**Note:** The step of shaping the canopy stack and the molar ears is very much subject to individual technique. The shape of the TALON FS reserve container and bag is more rounded at the top as opposed to other more tapered designs such as the Talon 2. This is in keeping with the curve of the TALON FS profile. While not significantly different from other designs, the rigger should do a couple of practice pack jobs on their first TALON FS container to get the feel for the balance and bulk distribution of a particular TALON FS /canopy combination. The ears of the molar bag are designed to accept more bulk to create the “TALON FS” curve.

## **2-Stacking and folding the reserve canopy**

The finished configuration for the canopy stack should look like Fig 4-12 when completed.

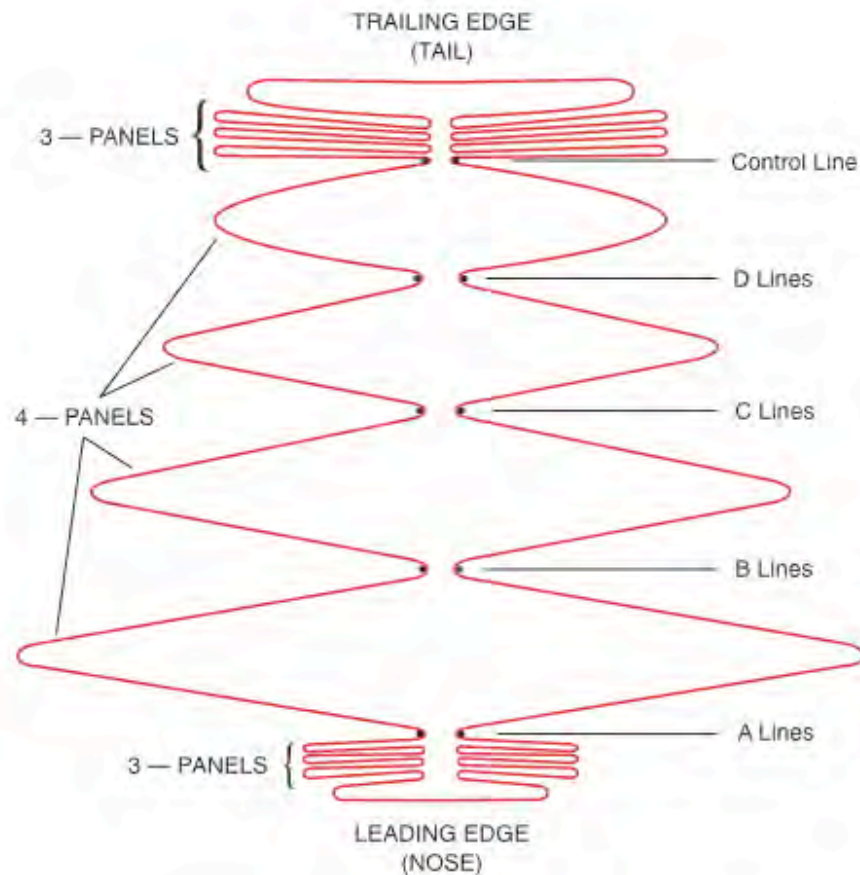


Fig 4-12



Pull tension on the “A” lines. Split the leading edge in half (Fig 4-13).



Fig-4-13

Fold half under ”A”-lines (Figs 4-14 and 4-15)



Fig 4-14



Fig 4-15

Pick up the “B” lines by the clamp and hold vertically over the “A” clamp (Fig 4-16)  
Note the spread of the leading edge panels.



Fig 4-16

Next stack the “B” lines on top of the “A” lines while distributing the cells equally to both sides.  
(Fig 4-17)



Fig 4-17

Keep the center cell in the middle.

Repeat this step with the “C” (Fig 4-18)



Fig 4-18

and “D” line groups (Fig 4-19)



Fig 4-19

Split the trailing edge and separate the control lines into right and left groups (Fig 4-20).



Fig 4-20

Remove the clamp from “D” line group.

Hold down the “D” lines at the line attachment points and pull down the control lines. (Fig 4-21)

Do not disturb the center of the canopy stack.



Fig 4-21



Set the deployment brakes and stow the excess line in the Velcro keepers. (Fig. 4-22).



Fig 4-22

The finished toggles should look like Fig. 4-23



Fig 4-23

Fold all the trailing edge to one side then pull the stabilizer panel taut (Fig 4-24).



Fig 4-24



Flake the trailing edge of the canopy starting with the outboard control lines. Fold each cell in half on top of the “D” line group (Fig. 4-25) until you get to the center.

Repeat with the opposite side.



Fig 4-25

### ***3- Place canopy into the deployment bag and stowing the lines***

Make sure all suspension lines are taut and towards the center of the pack job. (Fig 4-26)



Fig 4-26

Pull slider up to the slider stops.

Fold the center of the trailing edge back to expose the center of the “wind channel”. (Fig. 4-27)



Fig 4-27

Create an “S” fold in the stack. (Fig. 4-28)

Position a packing paddle at a third of the way up from the bottom of the canopy length on top of the stack. Place a gun cleaning rod at half the distance between the bottom and the packing paddle under the stack. (Fig. 4-29)

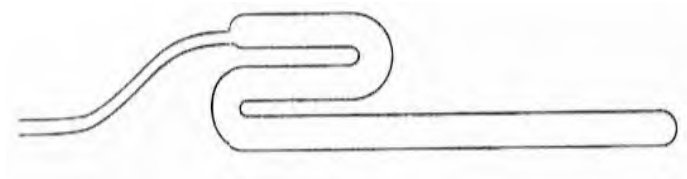


Fig 4-28

Pull the rod up and move the canopy with paddle towards container.



Fig 4-29

Pull the top center cell panel down to the bottom of the stack.

Wrap the center cell around the folded canopy with the left and right about halfway to the center, then secure with clamps, starting at the bottom (Fig. 4-30 ).

The width of the folded canopy needs to be the width of the freebag plus 2 in (5cm).



Fig 4-30

Continue to wrap the center cell around the canopy stack and secure with additional clamps (Fig. 4-31).



Fig 4-31

Lift the base of the folded canopy and slide the reserve bag underneath. The grommets in the tongue of the bag should be even with the bottom of the stack (Fig. 4-32).



Fig 4-32

Make a second “S” fold to match Fig. 4-33.

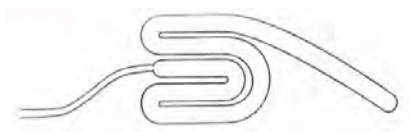


Fig 4-34A

The resultant fold is as Fig 4-35



Fig 4-33



Fig 4-34



Fig 4-35



Split the loose fabric at the top to form two “ears” (Fig 4-35).

Gather the center cell material along the middle seam until you reach the bottom along the middle seam. (Fig. 4-36)



Fig 4-36

Roll the material under but do not cover the center cell (Fig. 4-37).



Fig 4-37

Hold down the center cell material and then shape the molar folds (Fig. 4-38).



Fig 4-38

Fold the ends of the molar folds under to create the bulk necessary to fill the top of the reserve bag (Fig. 4-39).



Fig 4-39

When placing the canopy in the bag, allow the folded canopy to stick out 2-3 inches at the mouth of the bag to fill the corners of the reserve container (Fig. 4-40).



Fig 4-40

Close bag and secure with the locking stows (Fig. 4-41).



Fig 4-41

Shape the bag. The shape of the bag should reflect the desired shape of the reserve container.

Cover any exposed hook Velcro™ to avoid contact with the lines. (Fig. 4-42)

Now make clean line stows the same width as the line stow pocket.

Stow the lines neatly leaving sufficient line between the bag and riser ends (Fig 4-43).



Fig 4-42



Fig 4-43

## ***5-Closing the Container***

Place reserve risers into the pack tray. (Fig. 4-44)

Spread the risers with the rear riser to the outside to minimize the bulk against the back pad.



Fig 4-44

Place free-bag into the container and S-fold the bridle on top between the molar shaped canopy ears. (Fig. 4-45)

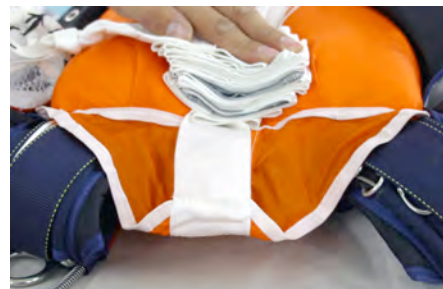


Fig 4-45



Fold the top yoke portion of the bag over the bridle. (Fig. 4-46)



Fig 4-46

Secure in place with a clamp. (Fig. 4-47)



Fig 4-47

Use the gun cleaning rod to thread the pull-up cord through Stealth pilot chute from bottom to top. (Fig. 4-48).



Fig 4-48

Center the base of the pilot chute on center grommet of freebag.

Compress pilot chute while stuffing fabric and mesh between the spring coils.

Position the cap of the pilot chute with the arrow facing toward top or bottom of container. (Fig. 4-49).

Secure with temporary pin.



Fig 4-49

**WARNING! Do not leave fabric outside of spring coils as a coil lock could occur and pilot chute launch may be inhibited!**



If an AAD such as a Cypres™ is installed, route the pull-up cord through the cutter first then through the right (#1) side flap grommet. (Fig. 4-50)



Fig 4-50

Next thread the left (#2) side flap grommet. Simultaneously close the side flaps (Fig. 4-51). Secure with temporary pin.



Fig 4-51

Use a packing paddle to insert the tuck-in flaps between the bottom of the deployment bag and the floor of the reserve container. (Fig. 4-53).

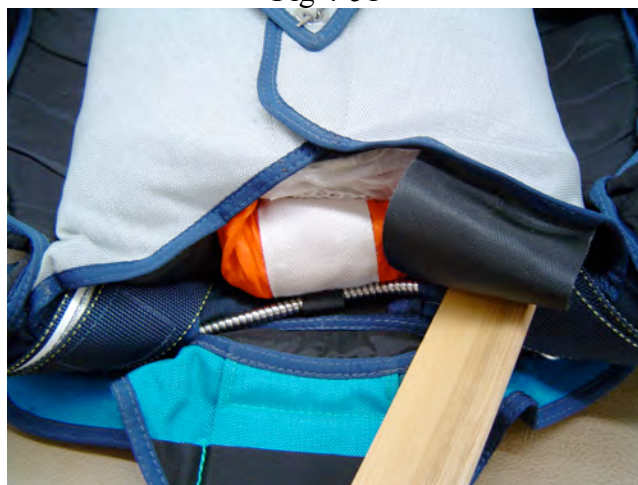


Fig 4-53

Close flap #4 and insert ripcord pin (Fig. 4-54).

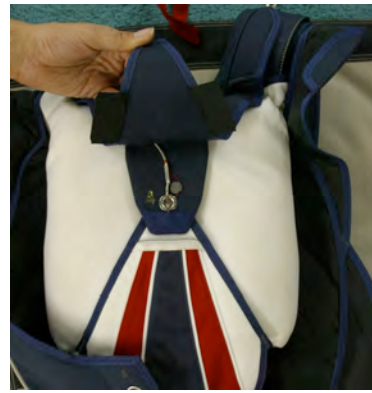


Fig 4-54

**CAUTION:** Place closing plate on bottom edge of inner top flap. Placing closing plate or kneeling on pin protector flap will kink or break the flap. The rigger should determine how tight the closing loop is and decide whether to perform a pull test.

**WARNING: MAXIMUM ALLOWABLE PULL FORCE ON RESERVE RIPCORD IS 22 POUNDS (10 KG).**

Once the rigger is satisfied that pull force is less than **22 pounds (10 Kg)** seal ripcord and log pack job in your logbook and in the Packing data card.

Place the data card in the data card pocket (Fig 4-55).



Fig 4-55

### **COUNT YOUR TOOLS!**

- 2- Packing weights, 4 Lb. (2 Kg)
- 1- Packing weight, 22 Lb. (10 Kg)
- 5- Plastic or rubber tipped packing clamps, (PONY size 3202)flaged
- 1- Packing Paddle 18" (50cm) or longer
- 1- Pull-up cord (microline), 72" (1.82m)
- 1- Gun Cleaning Rod, .22 CALIBER (5.56mm)
- 1- Knee-board or V-type Closing Plate
- 1- Temporary pin flagged

**COMPLETE PLACARD DATA ON ORANGE WARNING LABEL.  
FAILURE TO COMPLETE ORANGE WARNING LABEL  
WILL VOID THE TSO.**

**RIGGING INNOVATIONS INC.**

**P O BOX 86  
ELOY AZ 85231, USA**

**TEL 520.466.2655  
FAX 520.466.2656**

**e-mail**

**[tech@rigginginnovations.com](mailto:tech@rigginginnovations.com)**  
**[www.rigginginnovations.com](http://www.rigginginnovations.com)**